


# Depth Micrometer

## SERIES 329, 129 — Interchangeable Rod Type



### FEATURES

- $\varnothing 4$ mm interchangeable rods, with lapped measuring end, provide a wide measuring range.
- The rod length can be adjusted in 1" or 25mm increments.
- With ratchet stop for constant force.
- With measuring rod clamp.
- With SPC output (Series 329).
- Supplied in fitted plastic case.

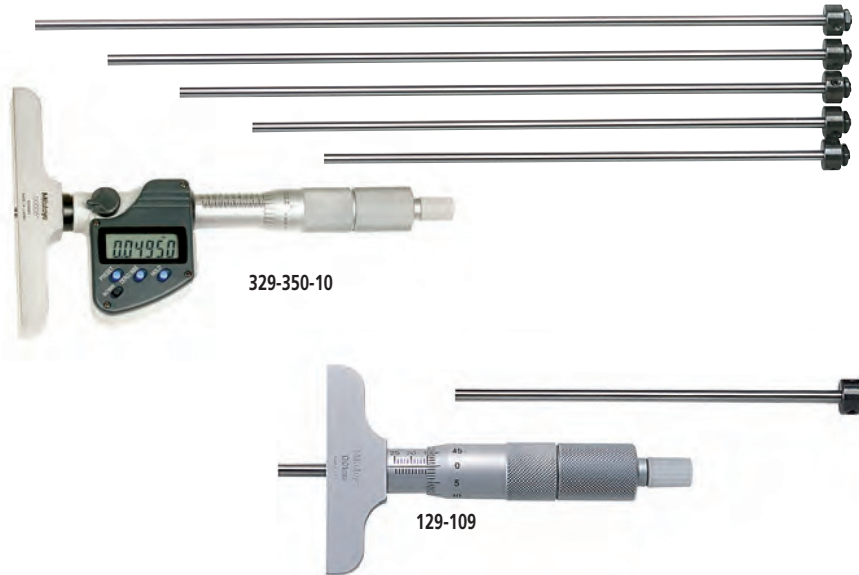

### SPECIFICATIONS

Metric Digimatic model			
Range	Order No.	Base Size	Rod Qty.
0 - 150mm	<b>329-250-10</b>	101.6x16mm	6 rods
0 - 300mm	<b>329-251-10</b>	101.6x16mm	12 rods

Metric			
Range	Order No.	Base Size	Rod Qty.
0 - 50mm	<b>129-109</b>	63.5x16mm	2 rods
0 - 100mm	<b>129-111</b>	63.5x16mm	4 rods
0 - 100mm	<b>129-115</b>	101.6x16mm	4 rods
0 - 150mm	<b>129-112</b>	63.5x16mm	6 rods
0 - 150mm	<b>129-116</b>	101.6x16mm	6 rods

Inch/Metric Digimatic model			
Range	Order No.	Base Size	Rod Qty.
0 - 6" / 0 - 152.4mm	<b>329-350-10</b>	4"x.63"	6 rods
0 - 12" / 0 - 304.8mm	<b>329-351-10</b>	4"x.63"	12 rods

Inch			
Range	Order No.	Base Size	Rod Qty.
0 - 4"	<b>129-127</b>	2.5"x.63"	4 rods
0 - 4"	<b>129-131</b>	4"x.63"	4 rods
0 - 6"	<b>129-128</b>	2.5"x.63"	6 rods
0 - 6"	<b>129-132</b>	4"x.63"	6 rods
0 - 12"	<b>129-149</b>	2.5"x.63"	12 rods
0 - 12"	<b>129-150</b>	4"x.63"	12 rods

### Technical Data

Accuracy:  $\pm 0.0012''/\pm 3\mu\text{m}$  for micrometer head feed  
 $\pm [0.0008 + (.00004 \times R/3)]''$   
 $R = \text{max. measuring length (inch)}$   
 $\pm (2 + L/75)\mu\text{m}$  for interchangeable rod,  
 $L = \text{Max. measuring length (mm)}$

Resolution\*:  $.00005''/0.001\text{mm}$  or  $0.001\text{mm}$   
 Graduation\*\*:  $.001''$  or  $0.01\text{mm}$   
 Flatness of reference face:  $.00005''$  for  $2.5''/1.3\text{mm}$  for  $63.5\text{mm}$  width base,  $.00008''$  for  $4''/2\mu\text{m}$  for  $101.6\text{mm}$  width base  
 Flatness of measuring rod face:  $0.3\mu\text{m}$   
 Parallelism between reference face and measuring rod face:  
 $[.00016 + (.00004 \times R/2)]''$   
 $R = \text{max. measuring range (inch)}$   
 $(4 + L/50)\mu\text{m}$ ,  $L = \text{Max. measuring length (mm)}$   
 Measuring rod diameter:  $.157''/4\text{mm}$   
 Display\*: LCD  
 Battery\*: SR44 (1 pc.), **938882**  
 Battery life\*: Approx. 3.5 years under normal use  
 \*Digital models \*\*Analog models

### Function of Digimatic Model

Origin-set, Zero-setting, Data hold, Data output, inch/mm conversion (on inch/metric models only)  
 Alarm: Low voltage, Counting value composition error  
 Function Lock  
 2 Presets

### Optional Accessories for Digimatic Model

**05CZA662**: SPC cable with data switch (40" / 1m)  
**05CZA663**: SPC cable with data switch (80" / 2m)



### DIMENSIONS

