

FEATURES



- Microprocessor based
- 2 Years Warantee
- Display 4 digit LED (red)
- Accuracy 2 digits
- **Range (Any One)** : a. 10-99.99 Hz (Res.:0.01hz)
b. 10-9999 Hz (Res.: 1Hz)
c. 1- 9.999 KHz (Res.: 0.001KHz)
- **Size (Any One)** : 96 mm x 48 mm
96 mm x 96 mm
72 mm x 72 mm
Special Adaptors to convert 96 x 96 mm sq size meters to 144 x 144 mm sq size meters are also available upon request
- Max. depth 105 mm
- Mounting: Flush
- **Aux. Supply** : 230V, 50Hz/110V, 50Hz/
24 ~ 110V D.C. (Any One)

FEATURES OF FREQUENCY METER

- 4 digit Display
- Accuracy : ± 0.02 of the reading
- Input voltage : 20-500 Volts

SPECIFICATIONS FOR FREQUENCY METER

- Display 14, 12mm H, Red led
- Power consumption AC 5VA
- Operating temperature range 0 ~ 50°C
- Storage temperature range 10 ~ 70°C
- Max relative humidity 95%
- Dielectric strength AC 2KV/1min
input to power terminals
AC 3 KV/MIN
All Terminals to case

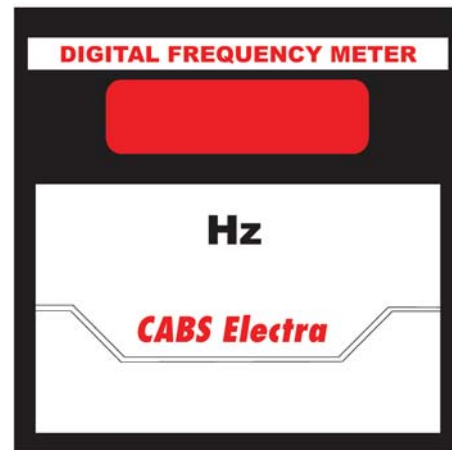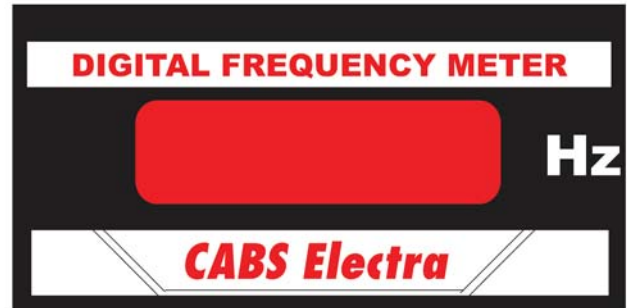

*Technical Specifications & Appearance are subject to change without prior notice