

Air velocity & IAQ meters


- testo 440 air velocity & IAQ meter
- testo 440 dP air velocity & IAQ meter incl. differential pressure

Intuitive: Clearly structured measurement menus for volume flow, heating & cooling load, K-factor, turbulence, data logging, mold indication, and more.

Convenient: Testo 440 kits include instrument-specific wireless and wired probes that offer greater measuring convenience and the instrument also connects to testo smart probes.

Space-saving: A universal Bluetooth or wired handle for all probes means more applications, with less equipment.

Efficient: Internal memory for up to 7,500 measurement points, a USB interface for data export and optional printout of all your measuring values.

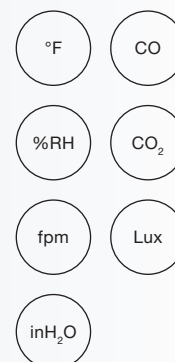

Compatible with a wide selection of Bluetooth® and wired probes.

The testo 440 air velocity and IAQ meter combines all the benefits of a compact handheld device with intuitive measurement menus and a comprehensive selection of air velocity & IAQ probes. This means you have all measuring tasks on air conditioning and ventilation systems reliably under control.

You can connect the testo 440 to a large selection of digital probes, the testo Smart Probes, or even numerous Testo temperature probes, allowing for numerous configurations to meet your needs. The clearly structured menus for measuring volume flow in ducts and at outlets, cooling/heating load, K-factor, turbulence, mold indication and


even a data logging mode are stored on the instrument for additional convenience. These menus enable you to accomplish the relevant measuring task more quickly, more efficiently and more reliably than ever before. Reports can also be exported as excel files via the USB interface or printed out directly on site.

The testo 440 air velocity & IAQ meter is available in two versions. The standard testo 440 and the testo 440 dP model version, which includes an integrated differential pressure sensor. This makes measurements at filters as well as Pitot tube and K-factor measurements possible.

The testo 440 probe system

Completely versatile: a universal handle for all air velocity & IAQ probes. This saves space and reduces weight, enabling you to perform accurate measurements in any application.

With the testo 440, you can handle any air conditioning and ventilation system measurements that come your way.

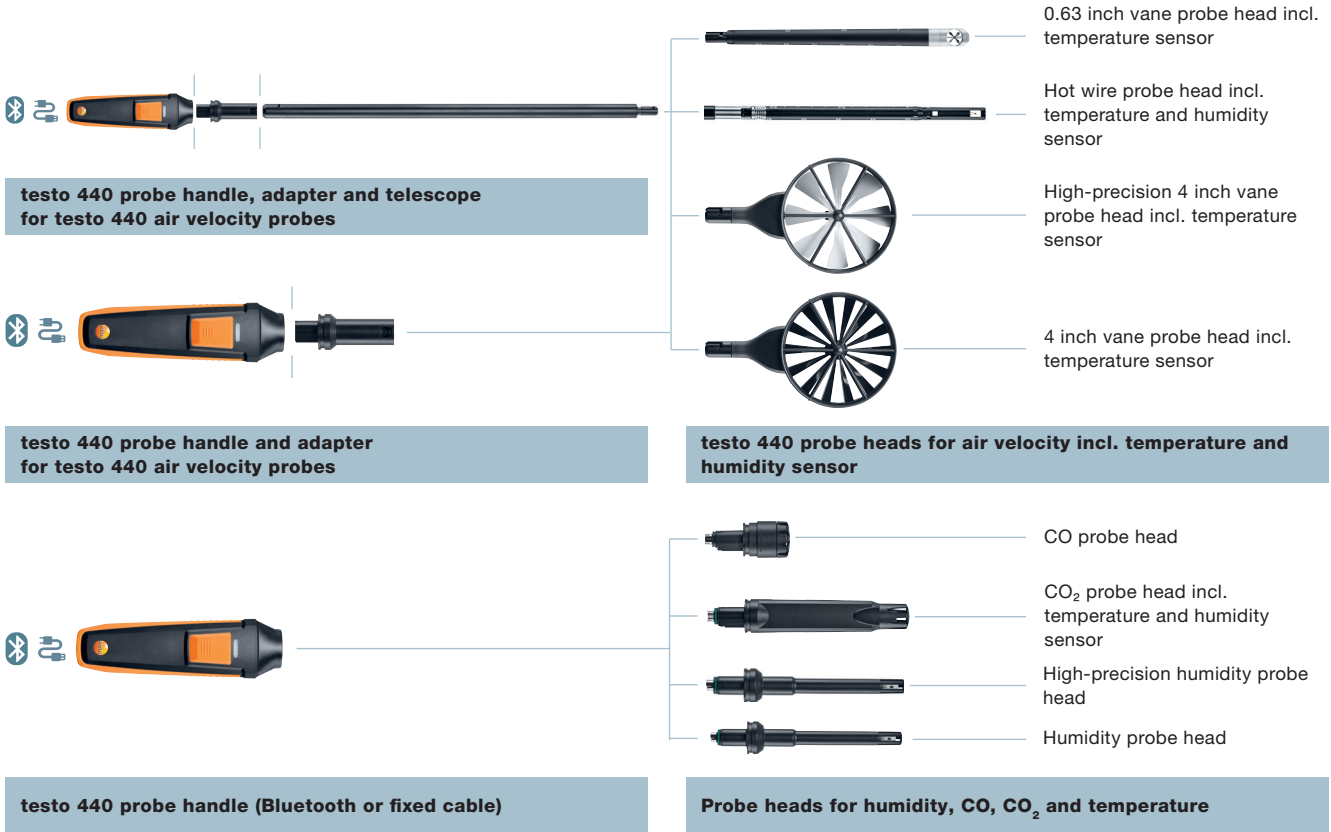

Advantages during measurement



All testo 440 air velocity probes for measurements in ducts have an optional scaled, extendible telescope (extends from 3 to 6.5 feet).



The 4 inch vane probe can be easily combined with the 90° angle and telescope, making measurements at ceiling outlets easier.



Do you need to carry out measurements in places where Bluetooth isn't possible? No problem: simply switch the probe head over from Bluetooth to the cable handle and you're ready to go.



With the testo 440 dP model, which includes a differential pressure sensor, you can ensure that the filters in air conditioning systems are working properly and no contamination in the outdoor air gets indoors.

Ordering data for testo 440

testo 440

Air velocity & IAQ meter, 3 x AA batteries, USB cable and calibration protocol.

Order no. 0560 4401



testo 440 dP

Air velocity & IAQ meter with integrated differential pressure sensor, connection hose, 3 x AA batteries, USB cable and calibration protocol.

Order no. 0560 4402



Technical data testo 440

	testo 440	testo 440 dP
Temperature (NTC)		
Measuring range	-40.0 to 302.0 °F	
Accuracy (±1 digit)	±1 °F (-40 to -13.2 °F) ±1 °F (-40 to -13.2 °F) ±0.7 °F (167 to 211.8 °F) ±0.5% of m.v. (remaining meas. range)	
Resolution	0.1 °F	
Temperature (TC)		
Measuring range	-328 to 2498 °F	
Accuracy (±1 digit)	(±0.2 °F + 0.3% of m.v.)	
Resolution	0.1 °F	
Differential pressure		
Measuring range		-60 to +60 InH ₂ O
Accuracy (±1 digit)	-	±0.02 InH ₂ O (0 to 0.40 InH ₂ O) ±0.1 InH ₂ O + 1.5% m.v. (0.40 to +60 InH ₂ O)
Resolution		0.01 InH ₂ O
Probe connections		
TC type K		1x
NTC TUC / digital probe with cable		1x
Bluetooth probe		1x digital Bluetooth probe or testo Smart Probe
Differential pressure	-	+
Technical data		
Operating temperature	-4 to 122 °F	
Storage temperature	-4 to 122 °F	
Battery type	3 x AA batteries	
Battery life	12 h (typically vane measurement)	
Weight	8.8 oz	
Dimensions	6.1 x 2.6 x 1.3 in.	



The wired digital probes and the NTC probes of the testo 440 all have a convenient TUC connection (Testo **U**niversal **C**onnector).

Ordering data for kits

Kits for measurement in ducts, at outlets, and at filters

testo 440 delta P Air Flow ComboKit 1 with BT

- testo 440 dP air velocity & IAQ measuring instrument incl. differential pressure with internal memory and data export function
- Universal probe handle with Bluetooth
- Hot wire probe head incl. temperature and humidity sensor
- 4 inch vane probe head incl. temperature sensor
- Telescopic extension (3 feet) and 90° angle to fit both probes
- Combo case for testo 440 dP and multiple probes



Order no. 0563 4409

testo 440 delta P Air Flow ComboKit 2 with BT

- testo 440 dP air velocity & IAQ measuring instrument incl. differential pressure with internal memory and data export function
- Universal probe handle with Bluetooth
- 0.63 inch vane probe head incl. temperature sensor
- 4 inch vane probe head incl. temperature sensor
- Humidity probe head incl. temperature sensor
- Telescopic extension (3 feet) and 90° angle to fit both probes
- Combo case for testo 440 dP and multiple probes



Order no. 0563 4410

Kits for measurements in ducts and at outlets

testo 440 Air Flow ComboKit 1 with BT

- testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- 4 inch vane probe with Bluetooth, incl. temperature sensor
- Hot wire probe with telescope (33.5 inch) incl. temperature sensor, fixed cable (6 feet)
- Measurement menu, e.g. for determining the volume flow
- Combo case for testo 440 and multiple probes



Order no. 0563 4406

testo 440 Air Flow ComboKit 2 with BT

- testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- 4 inch vane probe with Bluetooth, incl. temperature sensor
- 0.63 inch vane probe with telescope (33.5 inch), fixed cable (6 feet)
- Measurement menu, e.g. for determining the volume flow
- Combo case for testo 440 and multiple probes



Order no. 0563 4407

Ordering data for kits

Additional kits

testo 440 Hot Wire Kit

- testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- Hot wire probe incl. temperature sensor, fixed cable (6 feet) with telescope (33.5 inch)
- Measurement menu, e.g. for determining the volume flow and timed and multi-point mean calculation
- Basic case for testo 440 and 1 probe

Order no. 0563 4400



testo 440 0.63 inch Vane Kit

- testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- Vane probe, fixed cable (6 feet) with telescope (33.5 inch)
- Measurement menu, e.g. for determining the volume flow and timed and multi-point mean calculation
- Basic case for testo 440 and 1 probe

Order no. 0563 4401



testo 440 4 inch Vane Kit with BT

- testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- 4 inch vane probe with Bluetooth, incl. temperature sensor
- Measurement menu, e.g. for determining the volume flow
- Basic case for testo 440 and 1 probe

Order no. 0563 4403



testo 440 Indoor Comfort ComboKit with BT

- testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- Turbulence probe (4 inch)
- CO₂ probe with Bluetooth, incl. temperature and humidity sensor
- Combo case for testo 440 and multiple probes

Order no. 0563 4408



testo 440 CO₂ Kit with BT

- testo 440 air velocity & IAQ measuring instrument
- CO₂ probe with Bluetooth, incl. temperature and humidity sensor
- Basic case for testo 440 and 1 probe

Order no. 0563 4405



testo 440 Humidity Kit with BT

- testo 440 air velocity & IAQ measuring instrument
- Humidity and temperature probe with Bluetooth
- Basic case for testo 440 and 1 probe

Order no. 0563 4404



testo 440 Lux Kit

- testo 440 air velocity & IAQ measuring instrument
- Lux probe
- Basic case for testo 440 and 1 probe

Order no. 0563 4402



















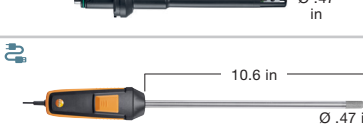

Digital air velocity probes

Probe type		Measuring range	Accuracy	Resolution	Order no.
Digital air velocity probes					
Hot wire probe with Bluetooth, incl. temperature and humidity sensor					0635 1571
Hot wire probe, fixed cable, incl. temperature and humidity sensor		0 to 9842.5 fpm -4 to 158°F 5 to 95% RH	±(5.91 fpm + 4% of m.v.) (0 to 3937 fpm) ±(98.4 fpm + 5% of m.v.) (3939 to 5905.5 fpm) ±0.9 °F (32 to 158 °F) ±1.4 °F (-4 to 32 °F) ±3.0% RH (10 to 35% RH) ±2.0% RH (35 to 65% RH) ±3.0% RH (65 to 90% RH) ±5% RH (remaining meas. range)	1.97 fpm 0.1 °F 0.1% RH	0635 1572
Hot wire probe head, incl. temperature and humidity sensor					0635 1570
Vane probe (Ø 0.63 inch) with Bluetooth, incl. temperature sensor					0635 9571
Vane probe (Ø 0.63 inch), fixed cable, incl. temperature sensor		118 to 9842.5 fpm 14 to 158 °F	±(39.37 fpm + 1% of m.v.) (118 to 7874 fpm) ±(39.37 fpm + 2% of m.v.) (7874 to 9842.5 fpm) ±3.2 °F	1.97 fpm 0.1 °F	0635 9572
Vane probe head (Ø 0.63 inch), incl. temperature sensor					0635 9570
Hot wire probe, fixed cable, incl. temperature sensor		0 to 5905.5 fpm -4 to 158 °F	±(1.97 fpm + 4% of m.v.) (0 to 3937 fpm) ±(98.42 fpm + 5% of m.v.) ±0.9 °F	1.97 fpm 0.1 °F	0635 1032
Vane probe (Ø 0.63 inch) fixed cable		118 to 9842.5 fpm	±(39.37 fpm + 1% of m.v.) (118 to 7874 fpm) ±(39.37 fpm + 2% of m.v.) (7874 to 9842.5 fpm)	19.7 fpm	0635 9532
Fume hood probe, fixed cable		0 to 984.25 fpm 32 to +122 °F	±(39.37 fpm + 5% of m.v.) (0 to 984.25 fpm) ±0.9 °F	1.97 fpm 0.1 °F	0635 1052
To measure flows in ducts with a large cross-section, we recommend an extension set (0554 0990). This enables the telescope to be extended to up to 6.5 feet for all air velocity probes with an interchangeable handle.					
High-precision vane probe (Ø 4 inch) with Bluetooth, including temperature sensor					0635 9371
High-precision vane probe (Ø 4 inch), fixed cable, incl. temperature sensor		19.7 to 2952.8 fpm -4 to 158 °F	±(1.97 fpm + 1.5% of m.v.) (19.7 to 2952.8 fpm) ±0.9 °F	1.97 fpm 0.1 °F	0635 9372
High-precision vane probe head (Ø 4 inch), incl. temperature sensor					0635 9370
Vane probe (Ø 4 inch) with Bluetooth, incl. temperature sensor					0635 9431
Vane probe (Ø 4 inch), fixed cable, incl. temperature sensor		59 to 6889.8 fpm -4 to 158°F	±(0.1 m/s + 1.5% of m.v.) 59 to 3937 fpm) ±(39.37 fpm + 1.5% of m.v.) (3939 to 6889.76 fpm) ±0.9 °F	1.97 fpm 0.1 °F	0635 9432
Vane probe head (Ø 4 inch), incl. temperature sensor					0635 9430
For convenient ceiling measurements, the telescope with 90° angle (0550 0960) has been developed. It can be easily attached to the 4 inch vane probes.					

¹⁾ For use with cable handle (order no. 0554 2222) or Bluetooth handle (order no. 0554 1111) in conjunction with an adapter (order no. 0554 2160).

Other digital probes and probe accessories






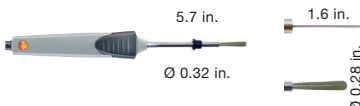





Probe type		Measuring range	Accuracy	Resolution	Order no.
Digital humidity probes					
Humidity/temperature probe with Bluetooth		0 to 100% RH -4 to 158°F	±2% RH (5 to 90% RH) ±0.9 °F	0.1% RH 0.1 °F	0636 9731
Humidity/temperature probe, fixed cable					0636 9732
Humidity/temperature probe head					0636 9730
High-precision humidity/temperature probe with Bluetooth		0 to 100% RH -4 to 158°F	±(0.6% RH + 0.7% of m.v.) (0 to 90% RH) ±(1.0% RH + 0.7% of m.v.) (90 to 100% RH) ±0.5 °F (59 to 86 °F) ±0.9 °F (remaining meas. range)	0.01% RH 0.1 °F	0636 9771
High-precision humidity/temperature probe, fixed cable					0636 9772
High-precision humidity/temperature probe head					0636 9770
Robust humidity/temperature probe for temperatures up to 356 °F, fixed cable		0 to 100% RH -4 to 356°F	±3% RH (0 to 2% RH) ±2% RH (2.1 to 98% RH) ±3% RH (98.1 to 100% RH) ±0.9 °F (-4 to 32 °F) ±0.7 °F (32 to 122°F) ±0.9 °F (122 to 356 °F)	0.1% RH 0.1 °F	0636 9775
Digital comfort probes					
Turbulence probe, fixed cable		0 to 984.25 fpm 32 to 122 °F	±(5.9 fpm + 4% of m.v.) (0 to 984.25 fpm) ±0.9 °F	1.97 fpm 0.1 °F	0628 0152
Lux probe, fixed cable		0 to 100,000 lux	DIN EN 13032-1 Appendix B Class C according to DIN 5032-7	0.1 lux (< 10,000 lux) 1 lux (≥ 10,000 lux)	0635 0551
CO ₂ probe with Bluetooth, incl. temperature and humidity sensor		0 to 10,000 ppm CO ₂ 5 to +95% RH 32 to 122 °F	±(50 ppm + 3% of m.v.) (0 to 5000 ppm) ±(100 ppm + 5% of m.v.) (5001 to 10,000 ppm) ±3% RH (10 to 35% RH) ±2% RH (35 to 65% RH) ±3% RH (65 to 90% RH) ±5% RH (remaining meas. range) ±0.9 °F	1 ppm 0.1% RH 0.1 °F	0632 1551
CO ₂ probe, fixed cable, incl. temperature and humidity sensor					0632 1552
CO ₂ probe head incl. temperature and humidity sensor					0632 1550
CO probe with Bluetooth		0 to 500 ppm	±3 ppm (0 to 30 ppm) ±10% of m.v. (30.1 to 500 ppm)	0.1 ppm	0632 1271
CO probe, fixed cable					0632 1272
CO probe head					0632 1270
Probe handle and adapter					
Cable handle for connecting testo 440 probe heads					0554 2222
Bluetooth handle for connecting testo 440 probe heads					0554 1111
Handle adapter for connecting testo 440 air velocity probes					0554 2160

²⁾ For use with cable handle (order no. 0554 2222) or Bluetooth handle (order no. 0554 1111).

testo Smart Probes

testo Smart Probes		Measuring range	Accuracy ± 1 digit	Resolution	Order no.
Temperature					
testo 115i Clamp thermometer with smartphone operation, for measurements on pipelines with diameters of 0.25 to 1.5 inches, incl. batteries and calibration protocol		-40 to 302 °F	± 2.3 °F (-4 to 185 °F)	0.1 °F	0560 1115
testo 905i Thermometer with smartphone operation, including batteries and calibration protocol		-58 to 302 °F	± 2 °F	0.1 °F	0560 1905
testo 805i Infrared thermometer with smartphone operation, including batteries and calibration protocol		-22 to 482 °F	2.7 °F or ± 1.5 % of mv (32 to 482 °F) ± 4 °F (-4 to 32 °F) ± 4.5 °F (-22 to -4.2 °F)	0.1 °F	0560 1805
Humidity					
testo 605i Thermohygrometer with smartphone operation, including batteries and calibration protocol		0 to 100% RH -4 to 140 °F	$\pm (1.8\% \text{ RH} + 3\% \text{ of m.v.})$ at 77 °F (5 to 80% RH) ± 1.4 °F (-4 to 32 °F) ± 0.9 °F (32 to 140 °F)	0.1% RH 0.1 °F	0560 1605
Flow					
testo 405i Thermal anemometer with smartphone operation, telescopic tube extendible to up to 15.75 inches, incl. batteries and calibration protocol		0 to 5906 fpm -4 to 140 °F	$\pm (19.7 \text{ fpm} + 5\% \text{ of mv})$ (0 to 394 fpm) $\pm (59.1 \text{ fpm} + 5\% \text{ of mv})$ (394 to 2953 fpm) ± 0.9 °F	1.97 fpm 0.1 °F	0560 1405
testo 410i Vane anemometer with smartphone operation, including batteries and calibration protocol		78.7 to 5906 fpm -4 to 140 °F	$\pm (39.4 \text{ fpm} + 2\% \text{ of mv})$ (78.7 to 3937 fpm) ± 0.9 °F	19.7 fpm 0.1 °F	0560 1410
Pressure					
testo 510i Differential pressure measuring instrument with smartphone operation, including hose set (\varnothing 0.15 in. and 0.2 in.) with adapter, batteries and calibration protocol		-60 to +60 InH ₂ O	± 0.02 InH ₂ O $\pm (0.1 \text{ InH}_2\text{O} + 1.5\% \text{ of mv})$ (+0 to +60 InH ₂ O)	0.004 InH ₂ O	0560 1510
testo 549i High-pressure measuring instrument with smartphone operation, including batteries and calibration protocol		-14 to +870 psi	0.5% of final value	0.14 psi	0560 1549

Analog temperature probes














Probe type	Dimensions Probe shaft/probe shaft tip	Measuring range	Accuracy	t ₉₉	Order no.
Watertight immersion/penetration probe NTC, fixed cable 4 feet	 4.5 in. Ø 0.2 in. 2 in. Ø 0.16 in.	-58 to 302 °F	±0.5 % of mv (212 to 302 °F) ±0.4 °F (-13 to 166.8 °F) ±0.7 °F (Remaining Range)	10 s	0615 1212
Robust air probe, NTC, fixed cable 4 feet	 4.5 in. Ø 0.2 in. 2 in. Ø 0.16 in.	-58 to 257 °F	±0.4 °F (-13° to 176 °F) ±0.7 °F (Remaining Range)	60 s	0615 1712
Clamp probe for measurements on pipes from 0.25 to 1.5 in. diameter, NTC, fixed cable 5 feet		-40 to 257 °F	±1.8 °F (-4 to 185 °F)	60 s	0615 5505
Robust air probe, TC type K, fixed cable	 4.5 in. Ø 0.16 in.	-76 to 752 °F	Class 2 ¹⁾	200 s	0602 1793
Fast-reaction surface probe with sprung thermocouple strip, also suitable for non-plane surfaces, measuring range briefly up to 932 °F, TC type K, fixed cable	 4.5 in. Ø 0.2 in. Ø 0.47 in.	-76 to 572 °F	Class 2 ¹⁾	3 s	0602 0393
Fast-reaction paddle surface probe, for measurements in places that are difficult to access, e.g. narrow openings and cracks, TC type K, fixed cable	 5.7 in. Ø 0.32 in. 1.6 in. Ø 0.28 in.	32 to 572 °F	Class 2 ¹⁾	5 s	0602 0193
Precise, watertight surface probe with small measuring head for plane surfaces, TC type K, fixed cable	 5.9 in. Ø 0.1 in. Ø 0.16 in.	-76 to 1832 °F	Class 1 ¹⁾	20 s	0602 0693
Fast-reaction surface probe with sprung thermocouple strip, angled for non-plane surfaces as well, measuring range briefly up to 932 °F, TC type K, fixed cable	 3.15 in. Ø 0.2 in. Ø 0.47 in.	-76 to 572 °F	Class 2 ¹⁾	3 s	0602 0993
Surface temperature probe TC type K, with telescope max. 39 in., for measurements in places that are difficult to access, fixed cable 5.25 ft. (correspondingly shorter when telescope is extended)	 39 in. 0.47 in. Ø 1 in.	-58 to 482 °F	Class 2 ¹⁾	3 s	0602 2394
Magnetic probe, adhesive power approx. 20 N, with magnets, for measurements on metal surfaces, TC type K, fixed cable	 1.4 in. Ø 0.79 in.	-58 to 338 °F	Class 2 ¹⁾	150 s	0602 4792
Magnetic probe, adhesive power approx. 10 N, with magnets, for higher temperatures, for measurements on metal surfaces, TC type K, fixed cable	 3.5 in. Ø 0.83 in.	-58 to 752 °F	Class 2 ¹⁾		0602 4892

¹⁾ According to standard EN 60584-2, the accuracy of Class 1 refers to -40 to 1832 °F (type K), Class 2 to -40 to 2192 °F (type K), Class 3 to -328 to 104 °F (type K). A probe only ever complies with one accuracy class.

Information about surface measurement:





- The specified response times t₉₉ are measured on polished steel or aluminium plates at 140 °F.
- The specified accuracies are sensor accuracies.
- Accuracy in your application depends on the surface properties (roughness), the material of the measurement object (thermal capacity and heat transfer) and the sensor accuracy. Testo will produce a corresponding calibration certificate for the deviations of your measurement system in your application. For this, Testo uses a surface test bed developed in cooperation with the PTB (Physikalisch Technische Bundesanstalt - National Metrology Institute of Germany).

Analog temperature probes

Probe type	Dimensions Probe shaft/probe shaft tip	Measuring range	Accuracy	t ₉₉	Order no.
Watertight surface probe with wider measuring tip for plane surfaces, TC type K, fixed cable		-76 to 752 °F	Class 2 ¹⁾	30 s	0602 1993
Pipe wrap probe with Velcro strip, for measuring temperatures on pipes with diameters up to max. 4.7 in., Tmax 248 °F, TC type K, fixed cable		-58 to 248 °F	Class 1 ¹⁾	90 s	0628 0020
Pipe wrap probe for pipe diameters 0.2 in. to 2.5 in., with interchangeable measuring head, measuring range briefly up to 536 °F, TC type K, fixed cable		-76 to 266 °F	Class 2 ¹⁾	5 s	0602 4592
Replacement measuring head for pipe wrap probe, TC type K		-76 to 266 °F	Class 2 ¹⁾	5 s	0602 0092
Clamp probe for measurements on pipes, pipe diameters 0.5 to 1 in., measuring range briefly up to 266 °F, TC type K, fixed cable		-58 to 212 °F	Class 2 ¹⁾	5 s	0602 4692
Precise and fast immersion probe, flexible, watertight, TC type K, fixed cable		-76 to 1832 °F	Class 1 ¹⁾	2 s	0602 0593
Ultra-fast, watertight immersion/penetration probe, TC type K, fixed cable		-76 to 1472 °F	Class 1 ¹⁾	3 s	0602 2693
Immersion measuring tip, flexible, TC type K		-328 to 1832 °F	Class 1 ¹⁾	5 s	0602 5792
Immersion measuring tip, flexible, TC type K		-328 to 104 °F	Class 3 ¹⁾	5 s	0602 5793
Immersion measuring tip, flexible, for measurements in air/flue gases (not suitable for measurements in smelters), TC type K		-328 to 2372 °F	Class 1 ¹⁾	4 s	0602 5693
Watertight immersion/penetration probe, TC type K, fixed cable		-76 to 752 °F	Class 2 ¹⁾	7 s	0602 1293
Flexible, low-mass immersion measuring tip, ideal for measurements in small volumes, such as Petri dishes or for surface measurements (e.g. fixed with adhesive tape)	 TC type K, 2 m, FEP-insulated thermal wire, temperature-resistant up to 392 °F, oval cable with dimensions: 0.09 x 0.06 in.	-328 to 1832 °F	Class 1 ¹⁾	1 s	0602 0493
Watertight food probe made of stainless steel (IP 65), TC type K, fixed cable		-76 to 752 °F	Class 2 ¹⁾	7 s	0602 2292







¹⁾ According to standard EN 60584-2, the accuracy of Class 1 refers to -40 to 1832 °F (type K), Class 2 to -40 to 2192 °F (type K), Class 3 to -328 to +104 °F (type K). A probe only ever complies with one accuracy class.

Analog probes

Probe type	Dimensions Probe shaft/probe shaft tip	Measuring range	Accuracy	t ₉₉	Order no.
Thermoelectric couples					
Thermoelectric couple with TC plug, flexible, length 31.5 in., fibreglass, TC type K	 31.5 in. Ø 0.6 in.	-58 to 752 °F	Class 2 ¹⁾	5 s	0602 0644
Thermoelectric couple with TC plug, flexible, length 59 in., fibreglass, TC type K	 59 in. Ø 0.6 in.	-58 to 752 °F	Class 2 ¹⁾	5 s	0602 0645
Thermoelectric couple with TC plug, flexible, length 59 in., PTFE, TC type K	 59 in. Ø 0.6 in.	-58 to 482 °F	Class 2 ¹⁾	5 s	0602 0646
Comfort probe					
Globe thermometer Ø 5.9 in., TC type K, for measuring radiant heat		32 to 248 °F	Class 1 ¹⁾		0602 0743











¹⁾ According to standard EN 60584-2, the accuracy of Class 1 refers to -40 to 1832 °F (type K), Class 2 to -40 to 2192 °F (type K), Class 3 to -328 to 104 °F (type K).
A probe only ever complies with one accuracy class.




Pitot tubes

Probe type	Dimensions Probe shaft/probe shaft tip	Measuring range	Order no.
Pitot tube, length 19.7 in., Ø 0.3 in., stainless steel, for measuring flow velocity*	 19.7 in. Ø 0.3 in.	Measuring range 197 to 19685 fpm Operating temperature 32 to 1,112 °F Pitot tube factor 1.0	0635 2045
Pitot tube, length 13.8 in., Ø 0.3 in., stainless steel, for measuring flow velocity*	 13.8 in. Ø 0.3 in.	Measuring range 197 to 19685 fpm Operating temperature 32 to 1,112 °F Pitot tube factor: 1.0	0635 2145
Pitot tube, length 39.4 in., Ø 0.3 in., stainless steel, for measuring flow velocity*	 39.4 in. Ø 0.3 in.	Measuring range 197 to 19685 fpm Operating temperature 32 to 1,112 °F Pitot tube factor: 1.0	0635 2345
Straight Pitot tube with integrated temperature measurement, incl. connection hose, length 14.17 in.	 14.17 in.	Measuring range: 197 to 5906 fpm Operating temperature: 32 to 1,112 °F Pitot tube factor: 0.67 Minimum immersion depth: 5.9 in.	0635 2043
Straight Pitot tube with integrated temperature measurement, incl. connection hose, length 19.7 in.	 19.7 in.	Measuring range: 197 to 5906 fpm Operating temperature: 32 to 1,112 °F Pitot tube factor: 0.67 Minimum immersion depth: 5.9 in.	0635 2143
Straight Pitot tube with integrated temperature measurement, incl. connection hose, length 39.4 in.	 39.4 in.	Measuring range: 197 to 5906 fpm Operating temperature: 32 to 1,112 °F Pitot tube factor: 0.67 Minimum immersion depth: 5.9 in.	0635 2243

*Connection hose required (order no. 0554 0440) or (order no. 0554 0453)

Accessories

Accessories for digital air velocity probes	Order no.
	
Extendible telescope for testo 440 air flow probes (14.8 to 39.4 inches incl. 90° angle)	0554 0960
	
Telescope extension (35.4 in.) for testo 440 flow probes	0554 0990
Other accessories	Order no.
	
Measuring stand for comfort level measurements with standard-compliant positioning of probes (incl. case)	0554 1590
	
Combo case for testo 440 and multiple probes	0516 4401
	
Service case for volume flow measurement	0516 4900
	
testovent 410 volume flow rate funnel, Ø 13.4 in. / 13 x 13 in., incl. case	0554 0410
	
testovent 415 volume flow rate funnel, Ø 8.3 in. / 7.5 x 7.5 in., incl. case	0554 0415
	
testovent 417 funnel set comprising funnel for plate outlets (Ø 7.9 in.) and funnel for fans (13 x 13 in.) for incoming/outgoing air	0563 4170
	
Flow straightener testovent 417	0554 4172
	
USB power supply incl. cable	0554 1105

Other accessories	Order no.
Connection hose, silicone, length 16 feet, maximum load capacity 2.8 inH ₂ O	0554 0440
Connection hose silicone-free for differential pressure measurement, length 16 feet, maximum load capacity 2.8 inH ₂ O	0554 0453
Control and calibration set for Testo humidity probes, saline solution with 11.3% RH and 75.3% RH, incl. adapter for Testo humidity probes	0554 0660
Printer	Order no.
	
Bluetooth®/IRDA printer incl. battery and power supply	0554 0621
Spare thermal paper for printer (6 rolls), measurement data documentation can be read for up to 10 years	0554 0568
Calibration certificates	Order no.
Calibration certificate CO ₂	400520 0033
NIST Temp certificate with 3 standard points: 50; 77; 104 °F or 68; 77; 104 °F	400520 1901
NIST Temperature certificate 3 cust. pts	400520 1902
NIST RH certificate with 2 standard points 11.3% and 75.3% RH at 77 °F	400520 2601
NIST RH certificate 2 cust. pts	400520 2602
NIST Air velocity certificate 3 std. pts	400520 4401
NIST Air velocity certificate 3 cust. pts	400520 4402
NIST Light certificate	400520 8501
Probe Handles and Stands	Order no.
	
Probe stand for flow measurements - to ensure standard-compliant positioning of probes	0554 1592
	
Telescoping probe handle with swivel head - for slanted ceiling outlets	0430 0946

1981 0614/dk/01_2018

Subject to change without notice.