

Technical Data

Accuracy: Refer to the list of specifications.
 Resolution*: .00005"/0.001mm or 0.001mm
 Graduation***: .0001" or 0.01mm
 Parallelism: .00012" / 3μm for models up to 3" / 75mm
 (3+R/100)μm for models over 75mm,
 R=max. range (mm) .00016" for 4" models
 Display*: LCD
 Battery*: SR44 (1 pc.), 938882
 Battery life*: Approx. 1.2 years under normal use
 *Digital models **Analog models


Function of Digital Model

Origin-set, Zero / ABS, Data hold, Data output,
 inch/mm conversion (on inch/metric models only)
 Alarm: Low voltage, Counting value composition error

Optional Accessories for Digital Model

05CZA662: SPC cable with data switch (1m / 40")
05CZA663: SPC cable with data switch (2m / 80")
937387: SPC cable for Quickmike type (1m / 40")
965013: SPC cable for Quickmike type (2m / 80")

TYPE AND DIMENSIONS

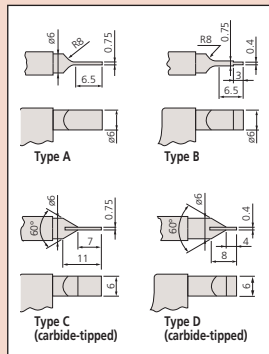

Blade Micrometers

SERIES 422,122 — Non-Rotating Spindle Type

FEATURES

- The anvil and the spindle have a blade for measuring the groove diameter of shafts, keyways, and other hard-to-reach areas.
- With Ratchet Stop for constant force.
- Speedy spindle feed of .4"/10mm /rev. (Quickmike type).
- With a standard bar except 0 - 1" and 0 -25mm model.
- Supplied in fitted plastic case.


Quickmike type



422-421



422-330

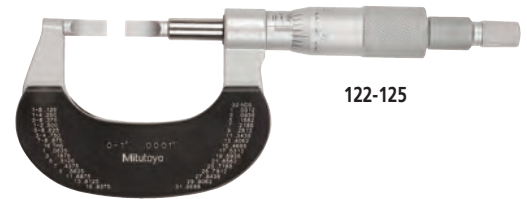

122-125

IP54

ABSOLUTE
 Absolute System Protection IPR010

SPECIFICATIONS

Metric		Digital model			
Range	Resolution	Order No.	Accuracy	Remarks	Mass (g)
0 - 25mm	0.001mm	422-230	±3μm	Type A	365
		422-260	±3μm	Type B	365
		422-270	±3μm	Type C	365
		422-271	±3μm	Type D	365
25 - 50mm	0.001mm	422-231	±3μm	Type A	565
		422-261	±3μm	Type B	565
50 - 75mm	0.001mm	422-232	±3μm	Type A	465
75 - 100mm	0.001mm	422-233	±4μm	Type A	580

Metric		Quickmike type			
Range	Resolution	Order No.	Accuracy	Mass (g)	
0 - 30mm	0.001mm	422-411	±3μm	350	
25 - 55mm	0.001mm	422-412	±3μm	490	

Metric						
Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)	
0 - 25mm	0.01mm	122-101	±3μm	Type A	260	
		122-111	±3μm	Type B	260	
		122-161	±3μm	Type C	275	
		122-141	±3μm	Type D	275	
25 - 50mm	0.01mm	122-102	±3μm	Type A	300	
		122-112	±3μm	Type B	300	
		122-162	±3μm	Type C	315	
		122-142	±3μm	Type D	315	
50 - 75mm	0.01mm	122-103	±3μm	Type A	360	
75 - 100mm	0.01mm	122-104	±4μm	Type A	525	
100 - 125mm	0.01mm	122-105	±4μm	Type A	670	
125 - 150mm	0.01mm	122-106	±4μm	Type A	775	
150 - 175mm	0.01mm	122-107	±5μm	Type A	950	
175 - 200mm	0.01mm	122-108	±5μm	Type A	1140	

Inch/Metric		Digital model			
Range	Resolution	Order No.	Accuracy	Remarks	Mass (g)
0 - 1" / 0 - 25.4mm	.00005" / 0.001mm	422-330	±.00015"	Type A	365
		422-360	±.00015"	Type B	365
		422-370	±.00015"	Type C	365
		422-371	±.00015"	Type D	365
		422-331	±.00015"	Type A	565
1 - 2" / 25.4 - 50.8mm	.00005" / 0.001mm	422-361	±.00015"	Type B	565
		422-332	±.00015"	Type A	465
2 - 3" / 50.8 - 76.2mm	.00005" / 0.001mm	422-332	±.00015"	Type A	465
3 - 4" / 76.2 - 101.6mm	.00005" / 0.001mm	422-333	±.0002"	Type A	580

Inch/Metric		Quickmike type			
Range	Resolution	Order No.	Accuracy	Remarks	Mass (g)
0 - 1.2" / 0 - 30.48mm	.00005" / 0.001mm	422-421	±.00015"	Type A	350
1 - 2.2" / 25.4 - 55.88mm	.00005" / 0.001mm	422-422	±.00015"	Type A	490

Inch					
Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 1"	.0001"	122-125	±.00015"	Type A	260
		122-135	±.00015"	Type B	260
		122-151	±.00015"	Type D	275
1 - 2"	.0001"	122-126	±.00015"	Type A	300
2 - 3"	.0001"	122-127	±.00015"	Type A	360
3 - 4"	.0001"	122-128	±.0002"	Type A	525